



DETAILS


IP Rating Class Standards Material Rated Voltage (per circuit) Net weight Fixation IP20 I CE / ROHS Aluminium + Copper 230V / 16A

1.84kg Recessed

KEY POINTS


- 2m track system
- Recessed and plastered into the ceiling for a seemless finish
- Multiple connection accessories
- TRIAC dimmable (3 phase) DALI dimmable (1 phase)

DIMENSIONS




2m length (1m & 3m also available)

CONNECTION DIAGRAMS



1 phase | 230V | 16A max

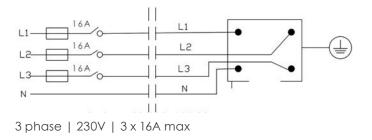

MECHANICAL LOAD DIAGRAM









MIDDLE CONNECTOR	Material Net weight Fixation	PC UL94V0 + Copper + Steel 113g Recessed / surface	m m 166
CONNECTOR	Material Net weight Fixation	PC UL94V0 + Copper + Steel 61g Recessed / surface	
COUPLER	Material Net weight Fixation	PC UL94V0 + Copper + Steel 27g Recessed / surface	
X CONNECTOR	Material Net weight Fixation	PC UL94V0 + Copper + Steel 230g Recessed / surface	
T CONNECTOR	Material Net weight Fixation	PC UL94V0 + Copper + Steel 185g Recessed / surface	99 166
L CONNECTOR	Material Net weight Fixation	PC UL94V0 + Copper + Steel 125g Recessed / surface	00 10 67 100



END CAP	Material Net weight Fixation	PC UL94V0 + Steel + Copper 11g Recessed	56 20 47.9
TRACK COVER	Material Finish Length Net weight Fixation	PC UL94V0 Black/White 3m 200g Surface / susp.	5) F 21.5
TRACK L COVER	Material Finish Net weight Fixation	PC UL94V0 Black/White 15g Recessed	
TRACK CONNECTOR COVER	Material Finish Net weight Fixation	PC UL94V0 Black/White 9g Recessed	56 73

• 01189 889414



sales@darklightdesign.com

Darklight Design Unit 10 Brookside Business Centre Church Road Swallowfield Reading Berkshire RG7 1TH

darklightdesign.com