


rond 2.0 retrofit/easyfit/backfit push button potential-free

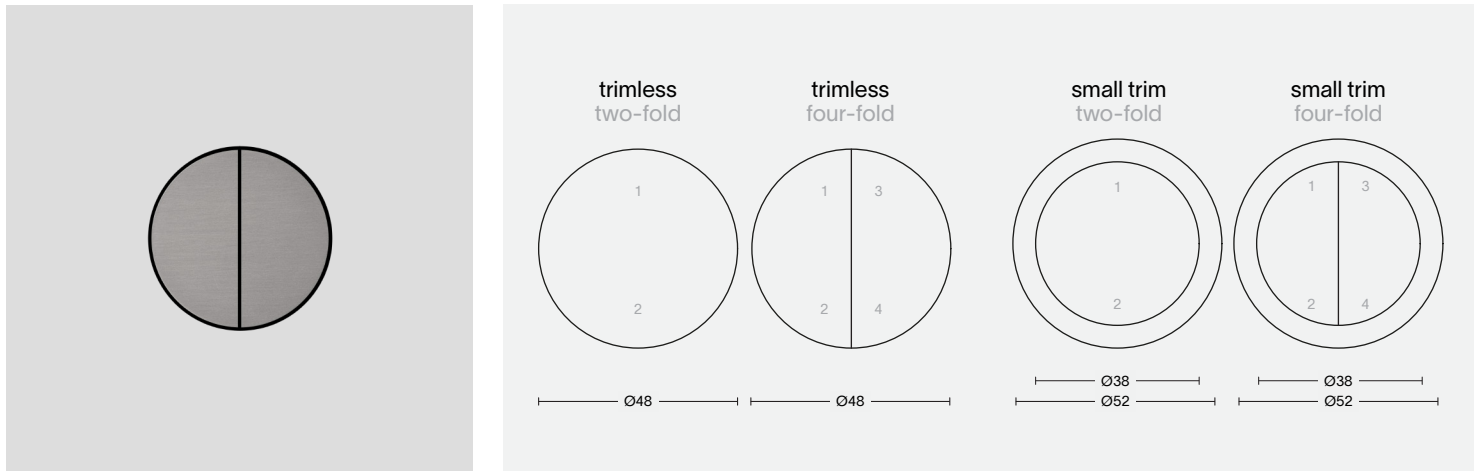

push button specs

type	potential-free, 24V, NO	
flush-mounting depth	36 mm	
adjustability	every 45° rotatable	
wire capacity	min. 0.5 - max 1.0 mm ² per terminal	
wire fixation	plug-in terminals	
ambient temperature	-5 till +40°C	
IP, IK rating	IP21-D	IK06
marking	CE	

accessoires

installation

8800 - 2011	retrofit plaster ring
8800 - 2013	easyfit plaster box - single
8800 - 2014	easyfit plaster box - double
8800 - 2016	backfit holder
8800 - 2010	removal tool

order number

	trimless		small trim	
	two-fold	four-fold	two-fold	four-fold
number of buttons				
basic black	8800-2068	8800-2078	8800-2088	8800-2098
basic white	8800-2069	8800-2079	8800-2089	8800-2099
black ano	8800-2070	8800-2080	8800-2090	8800-2100
white struc	8800-2071	8800-2081	8800-2091	8800-2101
brushed nickel	8800-2072	8800-2082	8800-2092	8800-2102
brushed brass	8800-2073	8800-2083	8800-2093	8800-2103
light bronze	8800-2074	8800-2084	8800-2094	8800-2104
dark bronze	8800-2075	8800-2085	8800-2095	8800-2105
canon de fusil light	8800-2076	8800-2086	8800-2096	8800-2106
canon de fusil dark	8800-2077	8800-2087	8800-2097	8800-2107