

Micro track 48V  
Micro binario 48V

CE IP20 

LENGHT / LUNGHEZZA  
1000 - 2000 - 3000 mm

FINISH / FINITURA  
Black Goffratino




10

19



DESIGN LIGHTING


Cartesio wall/ceiling tracklights

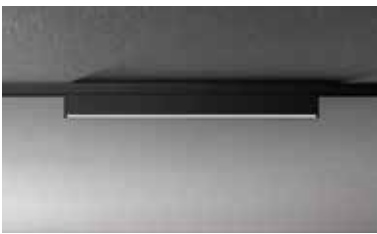

1. AUROOM



2. MASTER

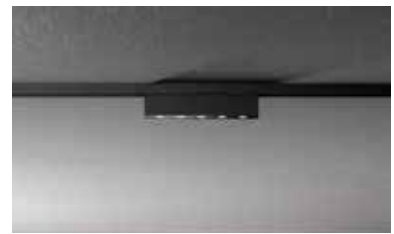

3. BOND



4. ADJUSTABLE SPOTLIGHT



5. SLASH



6. GLOBE



7. GLOBE PENDANT

Specifications at pages 328-329



### Auroom

Straight down light W. 315/915mm  
Lampada lineare diretta L. 315/915 mm


4,9W LED / 14,4W LED

CRI90

600 lm / 1800 lm

2700K / 3000K

CE IP20   48V   MacAdam Step 3 UGR<sub>19</sub>

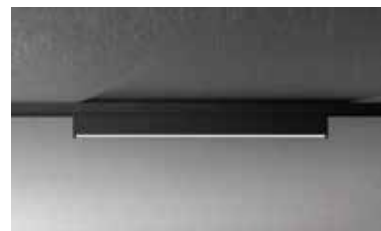

### Master

Straight diffused light W. 315/915mm  
Lampada lineare diffusa L. 315/915 mm

4,9W LED / 14,4W LED

CRI90

600 lm / 1800 lm

2700K / 3000K

CE IP20   48V    MacAdam Step 3 UGR<sub>19</sub>



### Slash

Triangular lamp W. 314mm  
Lampada triangolare L. 314mm

4,9W LED

CRI90

600 lm

2700K / 3000K

CE IP20   48V    MacAdam Step 3 UGR<sub>19</sub>



### Bond

5 or 10-lights spotlight  
Faretto 5 o 10 luci

5,7W LED / 11,1W LED

CRI90

525 lm / 1050 lm

2700K / 3000K





CE IP20   48V  <sup>25-60°</sup> UGR<sub>19</sub>



**Spot light**

Adjustable spotlights Ø 30/43/53 mm  
Faretti orientabili Ø 30/43/53 mm

3,2W / 10,6W / 13,9W - CRI90  
177 lm / 720 lm / 1065 lm  
2700K / 3000K

CE IP20  LED 48V  15-30°  15-30°  MacAdam Step 3 UGR<sub>19</sub>

**Globe**

Round lamp Ø 100/120 mm  
Lampada sfera Ø 100/120 mm

3W LED  
CRI90  
420 lm  
2700K / 3000K

CE IP20  LED 48V UGR<sub>19</sub>

**Globe**

Round pendant lamp Ø 100/120 mm  
Lampada sfera a sospensione Ø 100/120 mm

3W LED  
CRI90  
420 lm  
2700K / 3000K

CE IP20  LED 48V UGR<sub>19</sub>

